




**Figure 1**

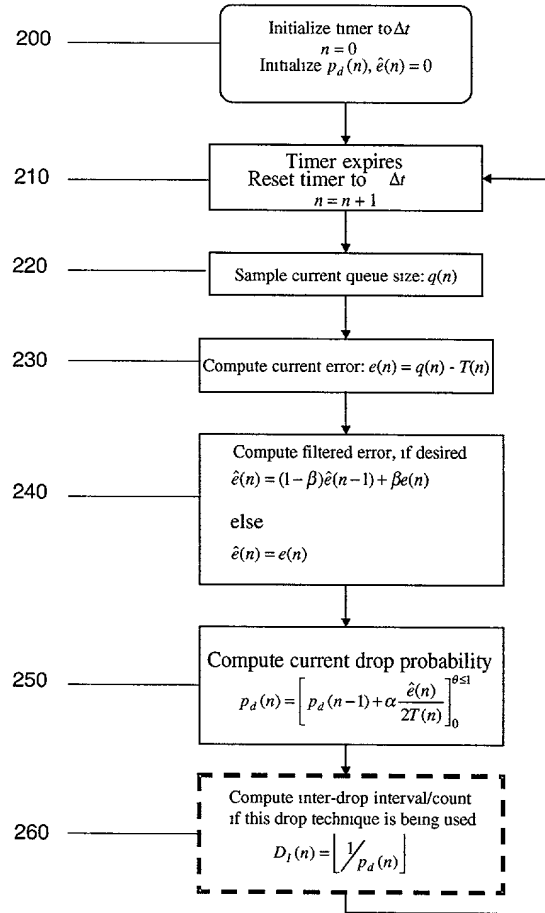


**Figure 2**

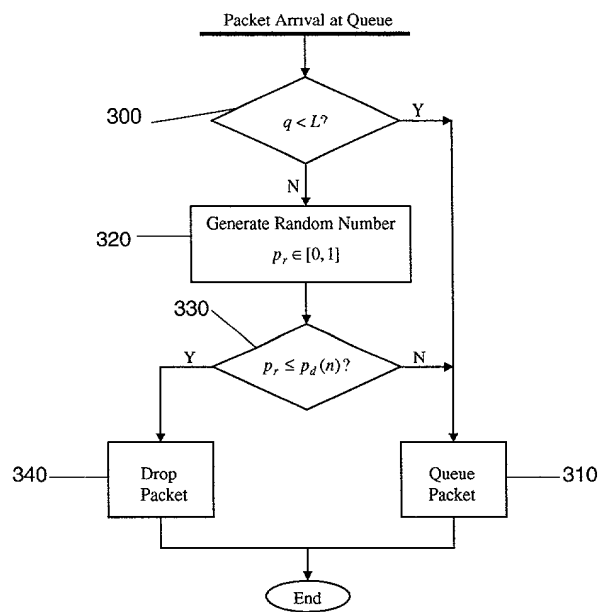


**Figure 3**

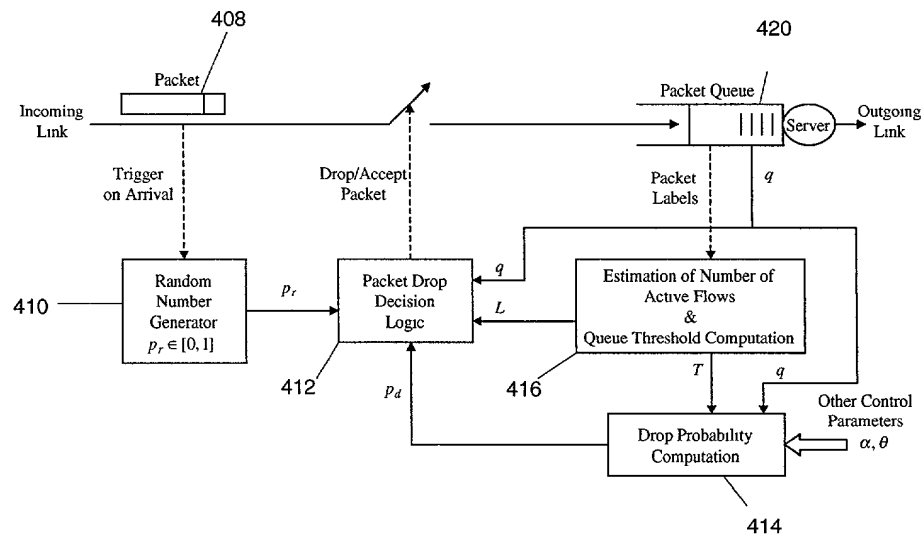

**Figure 4**

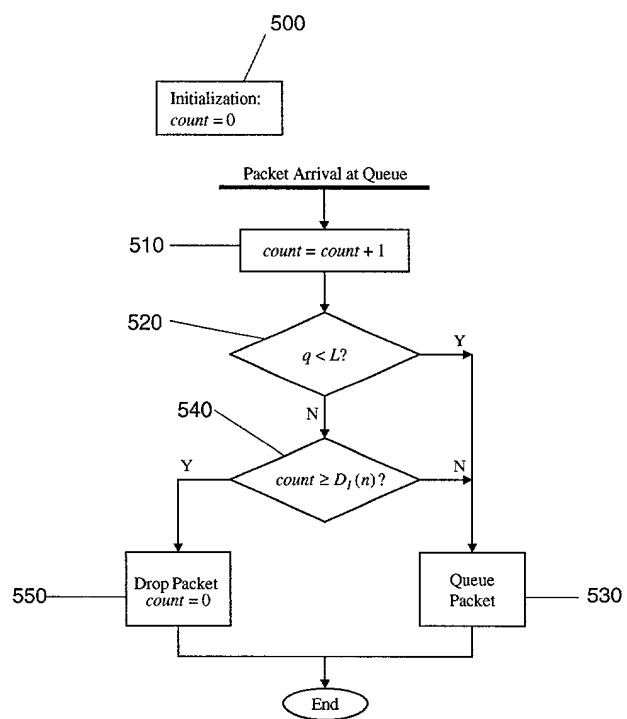


**Figure 5**

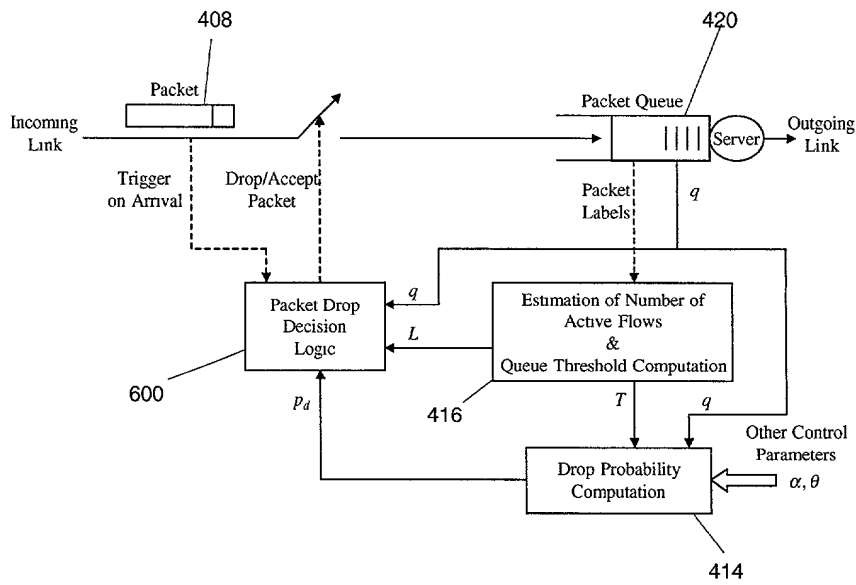


**Figure 6**

Define variables:

- bit\_vector                    /\* bit vector indexed by hash functions \*/
- session\_ID                 /\* e.g., source/destination addresses and port numbers \*/
- count                       /\* to count number of new sessions \*/
- measurement\_interval     /\* time interval over which sessions are counted \*/
- hash\_index                /\* hash index for hash function hash<sub>i</sub>, i, (i = 1, 2, ..., N) \*/

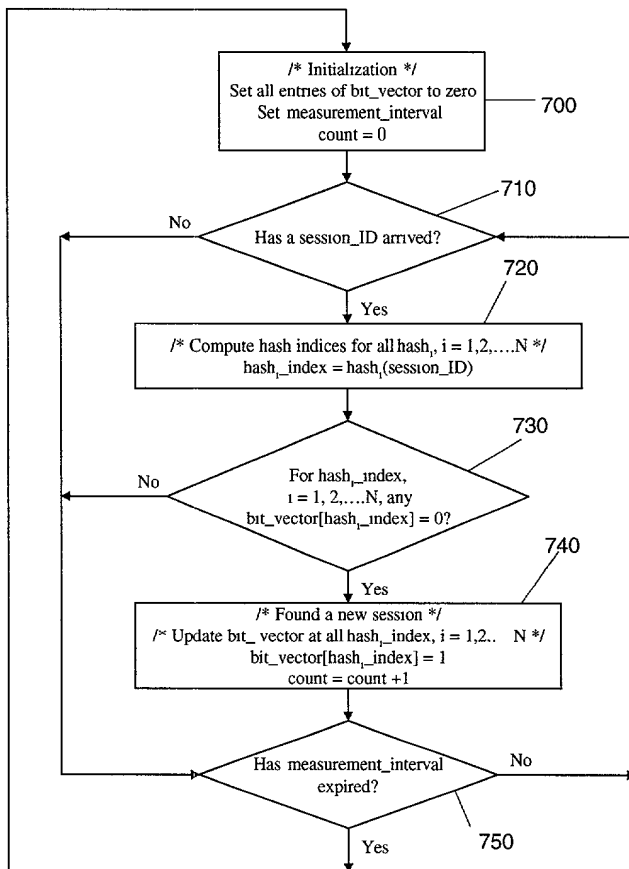


**Figure 7**

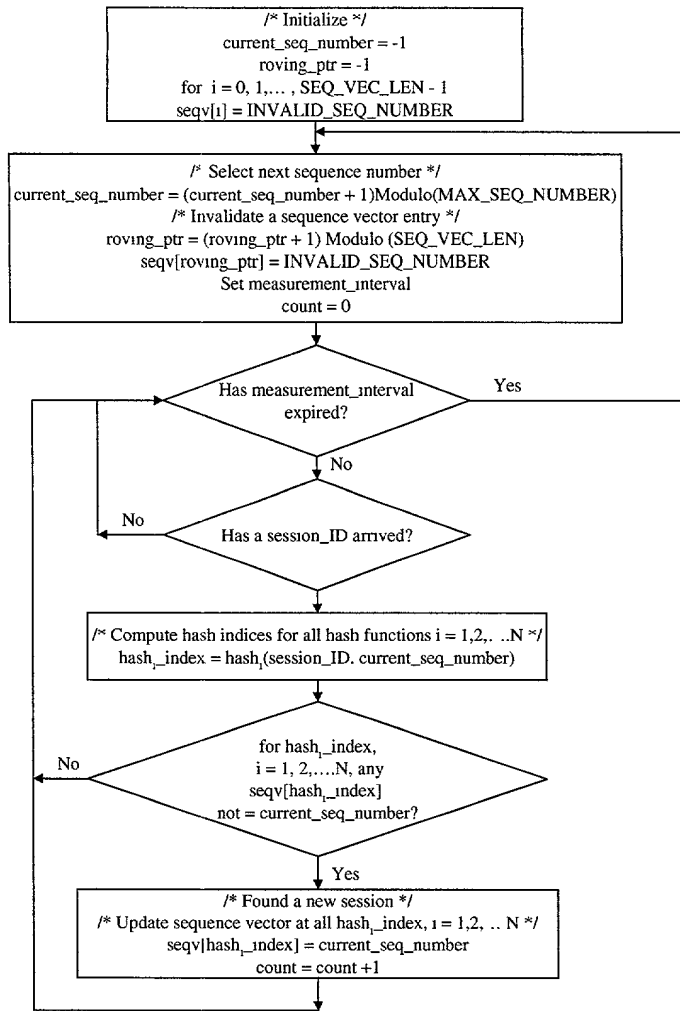

**Figure 8**



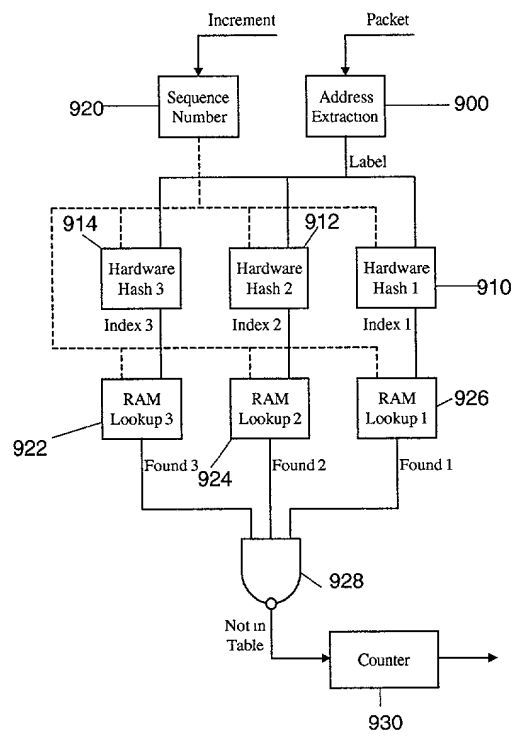

**Figure 9**